



A revolution in water purification

SCALE BLASTER[®]

The healthy alternative to water softeners

**Commercial Electronic Descaler
Model # SB-650**



Premium Model — up to 8" Pipe

Scale Blaster® - the electronic descaler

Scaling... a major problem for industry


Scale is a coating or precipitate deposited on surfaces that are in contact with hard water. When this hard water is heated or when evaporation takes place, calcium carbonate will form. Practically all equipment coming in contact with hard water will be affected by scale. This scale build-up will clog up pipes, tubes; block jets and form a layer of mineral scale deposits in heat transfer surfaces. The result are billion-dollar problems for industry. Higher energy costs, serious maintenance problems and prolong damage to expensive capital equipment are all symptoms of scale build-up. Up until now, the only reliable solution is expensive chemical scale inhibitors, acid washes or water softening equipment.

Significant Advantages

The benefits from using ScaleBlaster® are significant:

- **Eliminate limescale deposits from forming** - on sinks, faucets, appliances and heat transfer surfaces that come in contact with hard water.
- **Removes existing scale in pipes, tubes, jets, and heat transfer equipment** - continued scale accumulation cuts down on the flow rate of water in the building. Commercial & industrial equipment will no longer be subject to performance degradation.
- **Lower Energy Consumption** - scale build-up reduces the efficiency of heating systems and increases the time taken for them to achieve their required temperature. Just 1/4" of scale build-up can increase heating costs by 40% or more. Additional energy costs are incurred when pumping water through narrowed pipes and heating scaled-up boilers. ScaleBlaster® maintains the water through heat transfer coefficient of your system, which means you need less energy to run your process at peak performance.
- **Reduced Maintenance & Downtime** - maintenance is costly, time consuming and inconvenient. Equipment downtime and labor costs for routine cleanings will be eliminated. Systems must usually be drained with essential equipment taken out of service for descaling- a costly adventure. Scale inhibitor chemicals, acid washings and water-softening equipment will no longer be required.
- **Extends Life of Capital Equipment** - water systems and pipework represent a major investment. By reducing or eliminating acids, chemicals and water softening, capital equipment will have a longer life span, maximizing the return capital.
- **Environmentally friendly** - discharge water regulations have made the disposal of chemically-treated water a regulatory concern. ScaleBlaster® is non-invasive and adds nothing to the wafer, thus simplifying your compliance measures.
- **Easy Installation & Operation** - the electronic descaler system often takes only minutes to install and requires no plumbing*. Compare this to chemicals that often require drum storage and disposal, spill containment areas, feed pumps, tubing, injection quills, delivery access, handling equipment and more. An equivalent chemical program and its related equipment require significantly more attention and maintenance.

* Steel or galvanized pipe may need to be replaced with PVC pipe

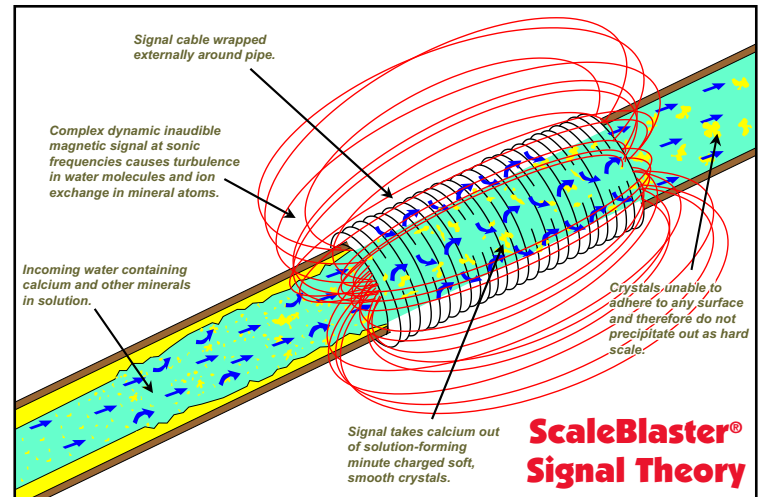

SB-650 ELECTRONIC DESCALER SPECIFICATION SHEET

- PIPE SIZE CAPACITY:** up to 8" pipe size diameter. Designed for commercial and industrial use only.
- PIPE TYPE:** PVC, copper or any non-ferrous based pipe. May work on smaller ferrous based pipe on re-circulating systems.
- INPUT VOLTAGE:** 90-264 VAC @ 47 to 63 Hz
- INPUT POWER:** less than 12 Watts
- OUTPUT VOLTAGE:** no more than 5 Volts CD (open circuit).
- OUTPUT CURRENT:** 4000 mA double blast
- CIRCUIT PROTECTION:** fuse and spike/surge suppression
- INPUT FUSE:** 1 amp, 250VAC, 5x20mm, fast acting, Radio Shack # 270-1049
- OUTPUT FUSE:** 3.15A, 250VAC, 5x20mm, fast acting, Radio Shack # 270-1054
- DESCALING METHOD:** power box supplies a square wave signal to a coil of wire that is wrapped around the pipe. The signal is changed anywhere from 1,000 to 20,000 times a second, producing a modulating frequency waveform that hits the resonant frequency of the calcium carbonate molecules.
- ENCLOSURE DIMENSIONS:** 14" x 12" x 6"
- ENCLOSURE MATERIAL:** 16 guage steel, powder coated ANSI 61 gray. NEMA 12, 13, 4. UL 508 type 3R, 4, 12 & 13. CSA Type 3R, 4, 12 & 13. IEC 60529, IP66. Weatherproof enclosure.
- SIGNAL CABLE:** 18 gauge, single stranded wire, 55 feet long (red) if used on pipe size 2" or less, or 18 gauge, 3 conductor wire (black), 66' long on pipe sizes 2 1/2" and up.
- WARRANTY:** 5 years parts and labor.
- SHIPPING WEIGHT:** 22 lbs.
- CARTON DIMENSIONS:** 20" x 16.5" x 11"

Partial list of Applications

- ◆ Agriculture
- ◆ Boilers
- ◆ Breweries
- ◆ Car Washing Equipment
- ◆ Coffee Makers
- ◆ Cooling Towers
- ◆ Dairy Farms
- ◆ Decorative Fountains
- ◆ Dish Washers
- ◆ Distillers
- ◆ Drip Irrigation
- ◆ Evaporative Coolers
- ◆ Evaporators
- ◆ Filtration Equipment
- ◆ Fitness Centers/Spas
- ◆ Heat Exchangers
- ◆ Hospitals
- ◆ Hotels
- ◆ Ice-making Machinery
- ◆ Laundry
- ◆ Manufacturing Facilities
- ◆ Nursing Homes
- ◆ Oil Wells
- ◆ Paper Pulp Mills
- ◆ Poultry Farms
- ◆ Processing Equipment
- ◆ Residential Homes
- ◆ Restaurants
- ◆ Schools
- ◆ Soft Drink Manufacturing
- ◆ Swimming Pools & Hot Tubs